




Four Wheel Mini Tractor 2WD

New series: Full gear drive-
(12HP-22HP)

PRECISION AGRICULTURE

RELIABLE

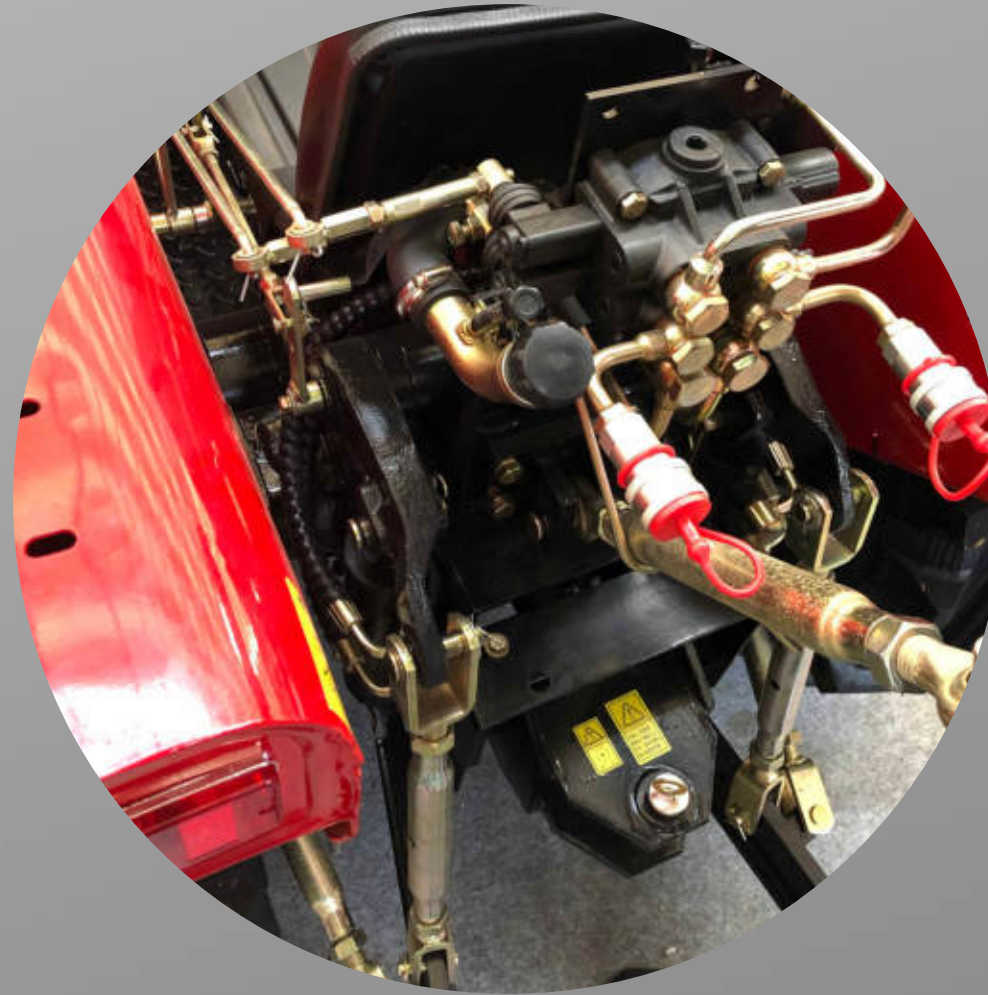

- Thick and strong 3 point suspension,
- High quality rubber tires are wear-resistant and durable.
- Gearbox air tight test, to make sure gearbox not leakage.

APPLICATION

upland field



paddy field



orchard



garden



terrace



farmstead

RANGE

- Power:12HP-22HP, 2WD. more powerful..
- Customized color and hood, or 4x4
- Gear shift:(3+1)x2, full gear drive, not easy to broken.



ATTACHMENTS

**More than 30
kinds of
implements can
attach to wheeled
tractor.**

**More details about attachment
shows in separately. We will
introduce matched implements
for different horsepower tractor
professionally.**



TECHNICAL FEATURES

| Model | | PG-Mini Tractor 120 | PG-Mini Tractor 160 | PG-Mini Tractor 180 | PG-Mini Tractor 200 | PG-Mini Tractor 220 |
|------------------------------|---------|---|---------------------|---------------------|---------------------|---------------------|
| 12-Hour Rated Power (kW) | | 8.50 (12HP) | 11.76 (16HP) | 13.20 (18HP) | 14.50 (20HP) | 16.20 (22HP) |
| Drive Type | | 4x2WD, Gear Transmission | | | | |
| Gear Shift | | (3+1)x2 | | | | |
| Wheelbase (mm) | | 1380 | | | | |
| Tread (mm) | | 950/990 | | | | |
| Ground Clearance (mm) | | 275 | | | | |
| Min.Turning Radius (m)< | | 2.80 | | | | |
| Hydraulic Suspension | | 3-Point Hitch | | | | |
| PTO Shaft Type | | Dependent, Clockwise, 6 Spline, Φ 35mm, 540rpm | | | | |
| Tire Model | | 4.00-12/7.50-16 | | | | |
| Engine Type | | Single Cylinder, Vertical, Water-Cooled, 4-Stroke, Diesel | | | | |
| Fuel Consumption (g/kW*h) | | ≤ 251.6 | | | | |
| Rated Traction Force (kN) | | 3.10 | 3.50 | 3.70 | 4.00 | 4.60 |
| Overall Dimension (LxWxH/mm) | | 2285x1050x1665 | 2285x1050x1665 | 2285x1180x1720 | 2305x1180x1720 | 2305x1200x1850 |
| Min. Operating Weight(kg) | | 805 | 805 | 810 | 810 | 930 |
| Theoretical Max. Speed | Forward | 25.27 | 25.27 | 29.37 | 29.37 | 31.76 |
| | Reverse | 8.66 | 8.66 | 10.05 | 10.05 | 11.21 |
| Rated Speed (rpm) | | 2200 | 2400 | 2400 | 2400 | 2400 |
| Displacement (L) | | 0.70 | 0.90 | 1.00 | 1.10 | 1.39 |

FEATURE

1. Gear transmission and the maximum speed can reach to 29km/hour.
2. Doing various of tasks in agricultural on plots up to 2 hectares.
3. You can monitor the temperature of the coolant on the dashboard of the mini tractor, preventing the tractor engine overheating.
4. High lifting force of the mechanism, which allows the operator to adjust the adapters of the attachments and work effectively in field or gardens.
5. More than 20 years of proven technology and tractor can be used more than 10 years.



THE SERVICES



Spare parts:

A complete range of original spare parts, guaranteed directly.

Warranty:

A precise certainty for the customer's satisfaction: 2-year warranty.

Assistance:

A team of specialists, well prepared and available to assure an efficient and resolving service.

Cooperation+:

Agricultural machinery industry information and customer marketing assistance.

Panda Tractor CO.,LTD

silvia@pandatractor.com

+86 15933376293

pandatractor.com