
Power Cultivator

THE REAL PROPERTY.

2wd drive and 4wd drive



RELIABLE

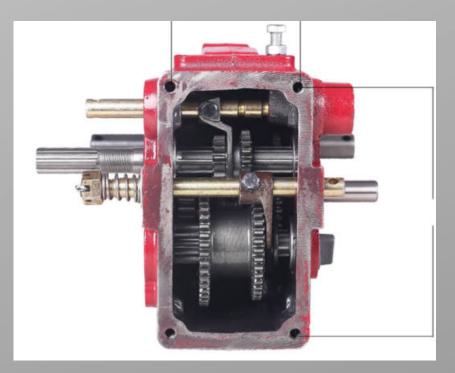



Integral casting gearbox has good rigidity, no deformation and high precision, long time using.
Thicken body, chain and gear transmission, working accessories are made by No. 75 manganese

2.Thicken body, chain and gear transmission, working accesso steel, wear-resistant and durable.

3. Multi-function: Dry land rotary tillage, paddy rotary tillage, pumping, transportation, threshing, ditching, spraying, harvesting, power generation. The power tiller can widely meet the hilly, mountainous area, large shed, orchard, paddy fields and other different areas of a variety of agronomic needs.


Corn Harvester



Engine stpye:186F diesel /190 gasoline Harvest speed: 2km/ h Walking speed: 2-4.5km/ h Fuel consumption: 0.6kg/ hour Work efficiency: > 666m²/hour cutting blades:24/32 pcs Outside dimension of harvesting platform: 2*0.7*1 m The cutting table weighs: 60kg Machine weight :180-240kg Tire:400-8 Connection way: gear drive/belt drive



Corn Harvester Advantage

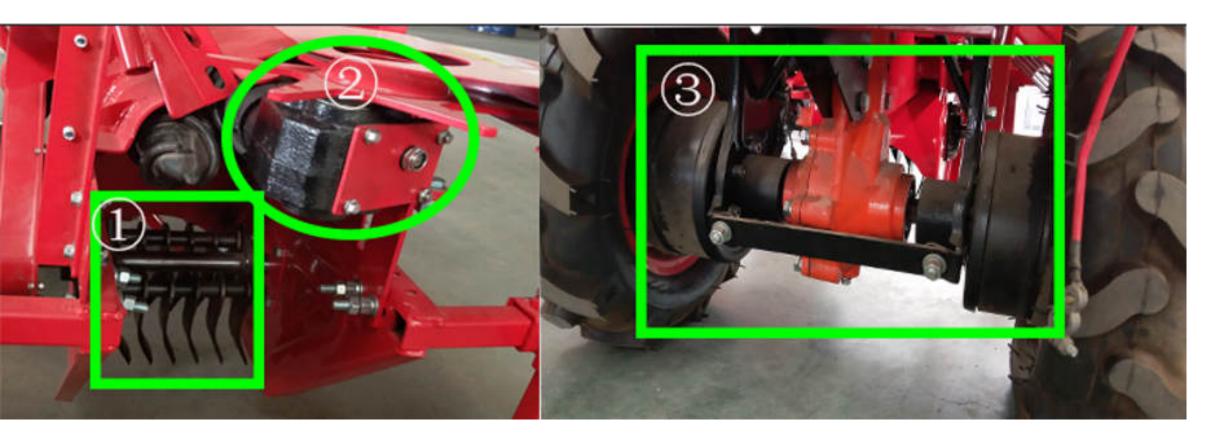

1) Corn stalks are crushed and returned to the field as fertilizer. High quality marterial blades, long time using

- 2) using gear box, greatly extend the life of the machine.
- 3) With differential speed steering function, flexible turning.



Reaper

Power: 186F Diesel engine, air cooler system Fuel tank:5.5L working width: 1200mm Number of working rows: 3 rows Tire: 400-8 Weight:200kg Size: 1700*810*1180mm,

RH186, Mainly used to harvest rice, wheat, alfalfa, buckwheat, oilseed rape, plant height in 0.3-1.5 meters, harvest width of 0.8-1 meters.

PT-401 (Four wheel drive tiller)

Type of gasoline engine: 170F four stroke Displacement: 212 cc Start mode: hand pull recoil start Fuel tank capacity: 6 litres Rotating tillage width: 65-85cm adjustable Rotating tillage depth: 10-30cm adjustable Ditch depth: 5-40cm adjustable Ditch width: 20-40cm adjustable Cooling system: forced air cooling Torque: 12/2500N, Transmission mode: gear transmission Gear: 4.5km/h slow forward, 9.8km/h fast forward, 3.2km/h reverse gear



PT-402 (Front ditcher tiller)



Diesel 186F/ Gasoline 177F Rubber wheel(350-6) / (400-8)

Free accessories: Iron wheel, backfilling blades, ditching blades, deep ploughing blades, weeding wheel, 350-6 tires,toolkit





datractor.com



Diesel:178F Rubber wheel (350-6)

Free accessories:

wide iron wheel, narrow iron wheel, backfilling blades, ditching blades, deep ploughing blades, weeding wheel, rotary tilling blades guard plate, 350-6 tires, toolkit



PT-404 (Tiller with light)

- Headlamp for comfortable working in the dark
- Easy start system
- Anti-vibration system
- Capacious fuel tank
- Large motor service life
- Height adjustment of the handle
- PTO for connecting technical attachments
- 190F gasoline, gear drive
- Gears: forward / backward 2/1
- Wheel size(cm): 500-12




PT-405 (Tillers with cover)




- Power: 1.Gasoline: 170F-190F 2. Diesel: 173F-188F
- Free Accessories: Rotary blades
- Gears: 0,1,2,-1

More accessories please see next page

More Accessories

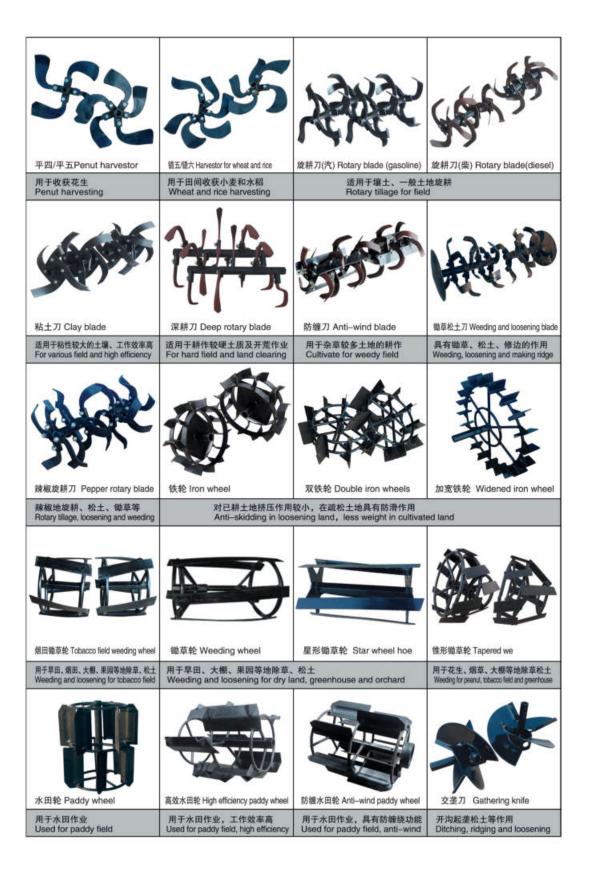



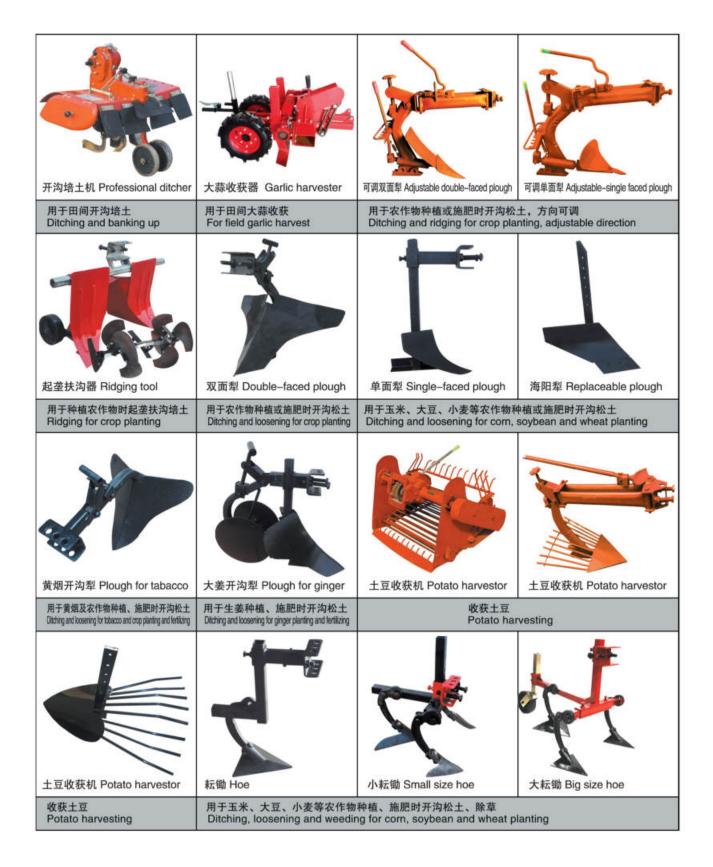











THE SERVICES

Spare parts:

A complete range of original spare parts, guaranteed directly.

Warranty:

A precise certainty for the customer's satisfaction: 2-year warranty.

Assistance:

A team of specialists, well prepared and available to assure an efficient and resolving service.

Cooperation

Agricultural machinery industry information and customer marketing assistance.

For more details:

Panda Tractor CO.,LTD

silvia@pandatractor.com +86 15933376293