

A G R I C U L T U R E

ORCHARD TRACTOR

30HP-60HP

W W W . P A N D A T R A C T O R . C O M





Born for over 90% of greenhouse or orchard or vineyard

Super short wheelbase, small turning radius and dedicated front axle, central transmission and final transmission on the same axis to reducing the height of the front axle. More suitable for garden, orchard, greenhouse etc.

The chassis is fitted with differential lock.

Enhanced sealing front drive axle, strong reliability. Full hydraulic steering system, light and flexible operation.

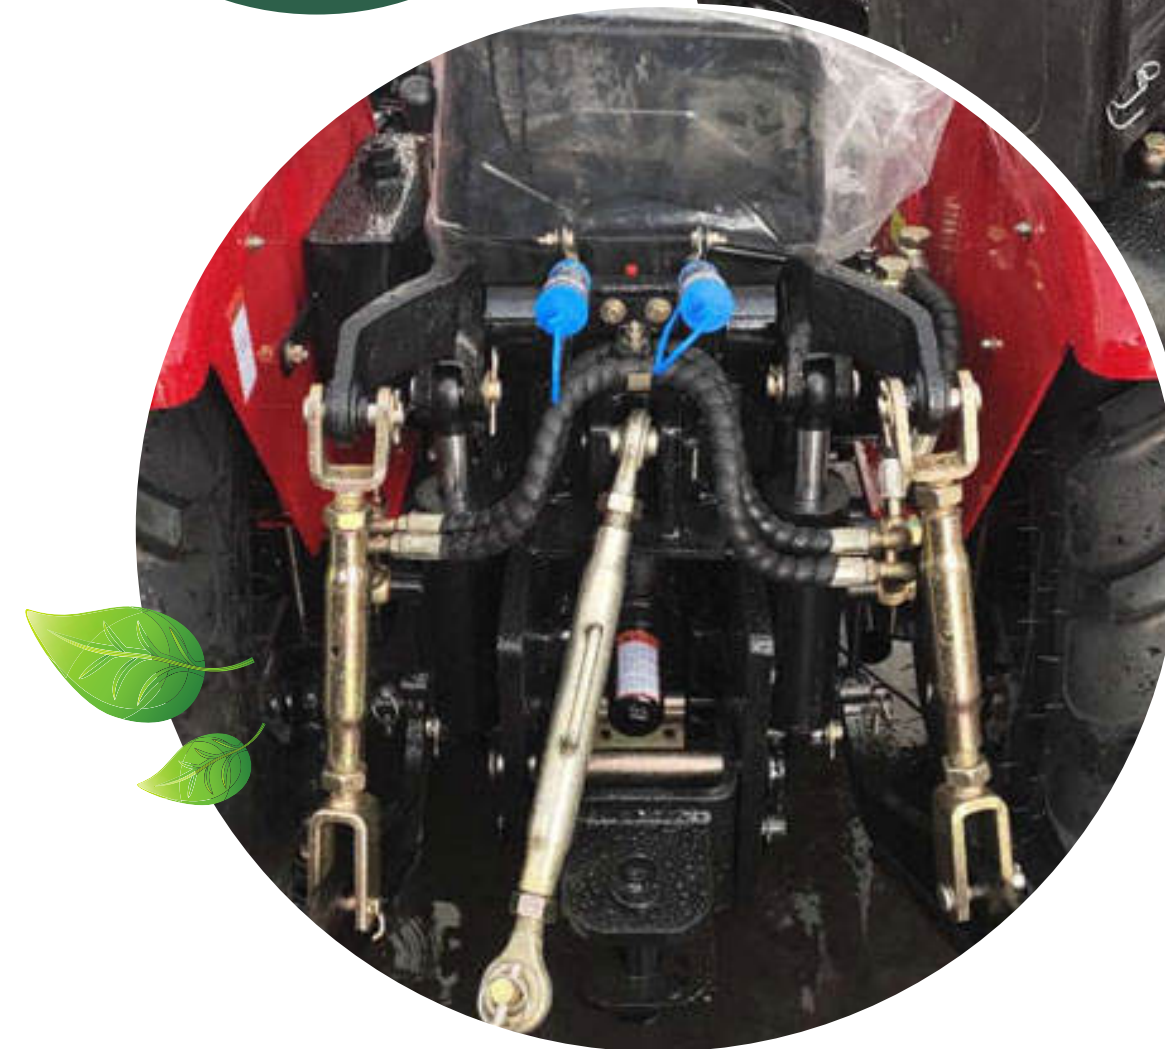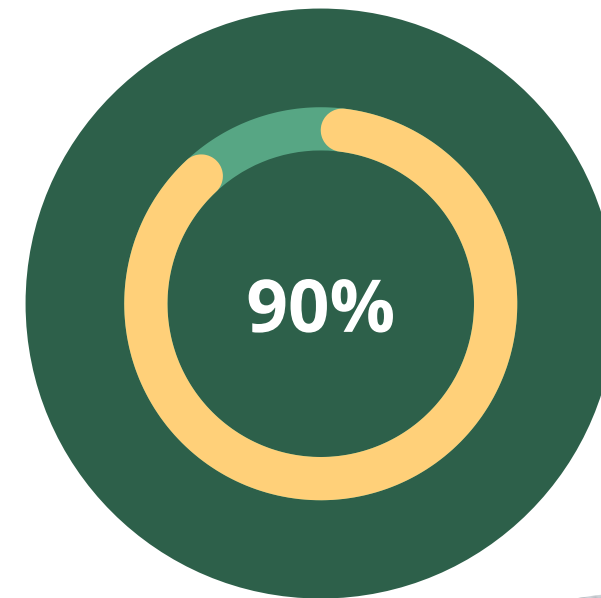



Green House

Orchard or garden or vineyard tractors are compact tractors that are designed to fit in small and narrow workspaces, as well as maneuver around tight corners. ...

www.pandatractor.com

RANGE

**Highly requirement
power: 30hp-60hp**

Customized color, cover, technical etc.

We understand that copy can be time consuming, so to help out we've provided some placeholder copy that you can simply copy-paste onto your templates.

www.pandatractor.com



More than 20 kinds of implements attach to it



More details about attachment shows in separately. We will introduce matched implements for different horsepower tractor professionally.



Optional installation of a group of hydraulic output, can be configured with a variety of agricultural machinery and tools.

Battery front, shorter body. Optimized chassis design, shorter wheelbase, more flexible turning.

Optimized design of rear traction, can simultaneously pull farm machinery and tools and use power output shaft.

The steering wheel is lower, the ergonomics is better. Dexterity compact, high efficiency. Increase engine fan blades to 420mm for better protection against engine heat.

SPECIFICATION



Vineyard Tractor		254	304	404	504
Power (hp)		25	30	40	50
Type		4WD			
Engine	Type	4 Cylinder, Vertical, Water-Cooled, 4-Stroke			
	Rated Rev. (r/min)	2200			
	Rated Power (kw)	18.4	22	25.74	29.4
Dimension (mm)	Length	2400			
	Width	1050	1100	1200	1200
	Height	1100 to Steering Height			
Front Wheel Ballast (kg)		12			
Rear Wheel Ballast (kg)		50			
Clutch		Dry-Friction, Single-Acting			
Transmission System	Gearbox	8F+2R			
	Central Transmission	Gear Sector			
Tractor Brake		Dry Brake, Discs			
Tyre	Front Wheel	6.00-12			
	Rear Wheel	9.50-16			
PTO Shaft Rev.		540/720			
Tread (mm) Adjustable	Front Wheel	950			
	Rear Wheel	960			
Wheel Base (mm) Adjustable		1100			
Ground Clearance (mm)		260			
Structure Mass (kg)		1200	1200	1440	1440



Our Services

Spare parts

A complete range of original spare parts, guaranteed directly.

Warranty

A precise certainty for the customer's satisfaction: 2-year warranty.

Cooperation+

A team of specialists, well prepared and available to assure an efficient and resolving service.
Agricultural machinery industry information and customer marketing assistance.

Our Contact Informations!

Phone : +86 15933376293

Website : www.pandatractor.com

Email : silvia@pandatractor.com

